

GBD 杆端关节轴承 GBD Double Spherical Bearings

产品特性 Product Features

- 球体采用高耐磨材料HPP28制成
- 连接器采用高强度和尺寸稳定性材料M163制成
- 自润滑、免维护
- 耐腐蚀，可用于液体介质环境
- 无噪音运行和不导电
- 可连接两个单元组件并消除中心误差
- 多种连接长度选择
- Spherical ball made of highly wear-resistant HPP28
- Connection rod made of high strength and shape-stable M163
- Maintenance free dry operation
- Corrosion-resistant
- No noise and nonconductive
- Mechanical connector between two components
- Compensation of misalignment errors
- Multichoice distance between two components




订购编码 Order PN

订购编码 Order PN:

GBD-04-25

中心距 Center distance
内径 Inner diameter

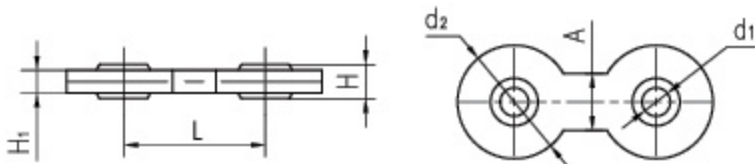

订购编码 Order PN	d ₁ E10 [mm]	d ₂ [mm]	L [mm]	A [mm]	H [mm]	H ₁ [mm]	最大静态抗拉强度 Max. axial static compressive strength		最大径向抗压强度 Max. radial compressive strength		最大调节角度 max. pivot angle	重量 Weight [g]
							径向 Radial [N]	轴向 Axial [N]	径向 Radial [N]	轴向 Axial [N]		
GBD-04-25	4	20	25	10	5	4	1100	1300	550	650	32°	3.5
GBD-04-50	4	20	50	10	5	4	1100	750	550	375	32°	4.8
GBD-04-75	4	20	75	10	5	4	1100	500	550	250	32°	6.1
GBD-05-25	5	20	25	10	6	4	1100	1300	550	650	37°	2.2
GBD-05-50	5	20	50	10	6	4	1100	750	550	375	37°	4.9
GBD-05-75	5	20	75	10	6	4	1100	500	550	250	37°	6.3
GBD-06-25	6	20	25	10	6	4	1100	1300	550	650	30°	3.4
GBD-06-50	6	20	50	10	6	4	1100	750	550	375	30°	4.8
GBD-06-75	6	20	75	10	6	4	1100	500	550	250	30°	3.4
GBD-08-60	8	30	60	15	8	7	3000	3500	1500	1750	20°	15.2
GBD-08-100	8	30	100	15	8	7	3000	1900	1500	950	20°	19.5
GBD-10-60	10	30	60	15	9	7	2500	3500	1250	1750	25°	15.3
GBD-10-100	10	30	100	15	9	7	2500	1900	1250	950	25°	19.4
GBD-12-60	12	30	60	15	10	7	2000	3500	1000	1750	25°	14.7
GBD-12-100	12	30	100	15	10	7	2500	1900	1000	950	25°	18.8